


# ACTIVE TOOLING

For Plastic.

樹脂用

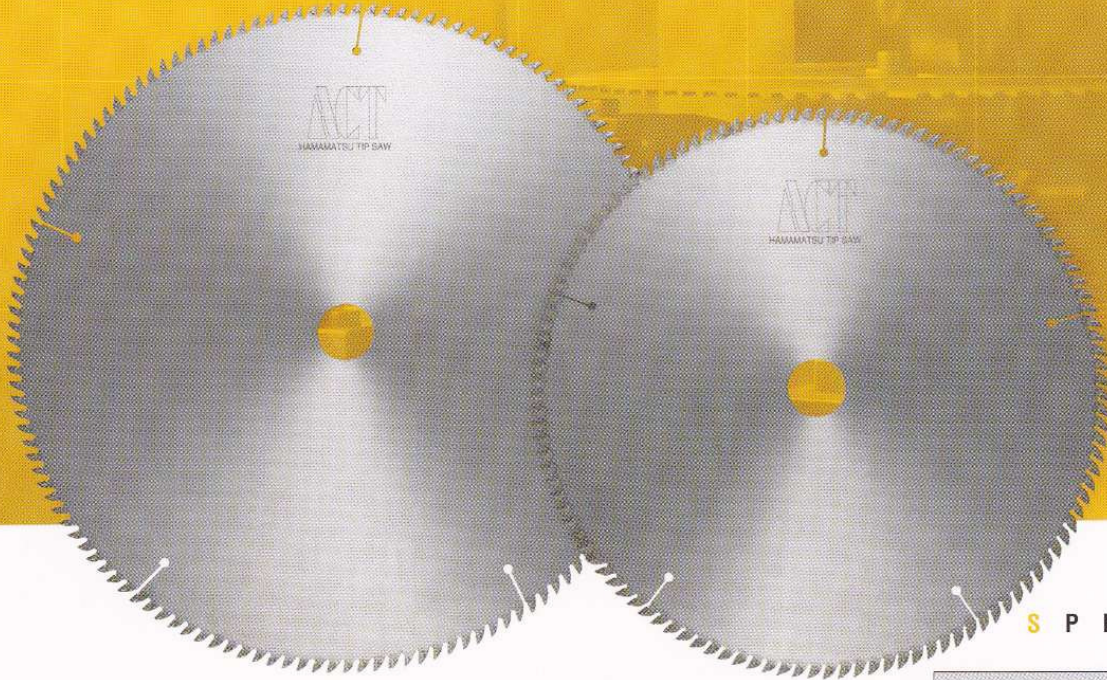


## SPECIFICATION 07

外径 (D)	刃厚 (T1)	台厚 (T2)	内径 (d)	刃数 (Z)	刃型 blade type
205	1.8	1.2	25.4	80	BC
	1.8	1.2	25.4	100	BC
255	1.8	1.2	25.4	80	BC
	1.8	1.2	25.4	100	BC
	1.8	1.2	25.4	120	BC
	2.4	1.8	25.4	80	BC
	2.4	1.8	25.4	100	BC
	2.4	1.8	25.4	120	BC
	305	2.0	1.4	25.4	100
	2.0	1.4	31.75	100	BC・D
	2.4	1.8	25.4	100	BC
	3.0	2.2	25.4	100	BC
	1.5	1.1	32.0	120	BC
	2.0	1.4	25.4	120	BC
	2.4	1.8	25.4	120	BC
	3.0	2.2	25.4	120	BC
	2.2	1.6	25.4	140	BC
	2.2	1.6	25.4	160	BC
	320	2.0	1.4	25.4	120
	2.0	1.4	31.75	120	BC
	355	3.0	2.2	25.4	100
	3.0	2.2	25.4	120	BC
	405	3.0	2.2	25.4	120
	3.0	2.2	25.4	140	BC

blade type : **BC**



blade type : **D**



樹脂



アクリル



切断

※塩ビ・アクリル・ABS・ペークライト等の切断に適します。

有限 浜松チップソー工業所

静岡県浜松市南区四本松町326-4  
TEL 053-426-2824 FAX 053-425-5518 E-mail : act@h-tipsaw.co.jp

<http://www.h-tipsaw.co.jp>