

ACTIVE TOOLING

For Multi-Rip General Wood & Bamboo Applications <Gang Rip Saw>

一般木材〈ギャングリップ〉・竹用／薄鋸



SPECIFICATION 04

■一般木材 ギャングリップ用

外径 (D)	刃厚 (T1)	台厚 (T2)	内径 (d)	刃数 (Z)	刃型 blade type
255	2.0	1.4	75.0	40	BC
	2.6	1.8	75.0	40	BC
	3.0	2.0	75.0	40	BC
305	2.0	1.4	75.0	40	BC
	2.6	1.8	75.0	40	BC
	3.0	2.0	75.0	40	BC
355	3.2	2.2	75.0	40	BC
380	3.4	2.4	75.0	40	BC
405	3.2	2.2	75.0	40	BC
	3.4	2.4	45.0	30	BA
455	3.4	2.4	105.0	30	BA
	4.4	3.0	90.0	40	BC
	6.0	4.6	90.0	40	BC

※ギャングリップソーに適用できません。

■薄鋸


外径 (D)	刃厚 (T1)	台厚 (T2)	内径 (d)	刃数 (Z)	刃型 blade type
182	1.0	0.7	40.0	24	B
	1.1	0.85	40.0	24	B
	1.1	0.85	40.0	30	B
200	1.3	0.9	40.0	36	BC
	1.4	1.0	60.0	36	BC
	1.6	1.2	50.0	30	BC
230	1.6	1.1	60.0	36	BC
	1.8	1.3	40.0	30	BC
250	1.7	1.2	80.0	24	B
	1.7	1.2	60.0	36	BC
255	1.7	1.2	50.0	42	BC
	1.8	1.3	60.0	36	BC
275	1.7	1.2	60.0	36	BC
305	1.8	1.3	50.0	48	BC
	2.0	1.5	50.0	48	BC
325	1.9	1.4	50.0	48	BC

※フロア材、ブラインド材等を歩留りよく高精度に挽き割ることが可能です。


blade type : **BC**



blade type : **B**



blade type : **BA**



一般木材



生バーチ



ギャング・リップ

ACTIVE TOOLING

For General Applications / Ripping

一般木材〈タテ挽き用〉



SPECIFICATION 03

blade type : **BC**



blade type : **C**



blade type : **A**



blade type : **BA**



一般木材



スチロール



タテ挽き

※発泡ウレタン、スチロールの切断にも対応できます。

外径 (D)	刃厚 (T1)	台厚 (T2)	内径 (d)	刃数 (Z)	刃型 blade type
205	1.2	0.8	25.4	40	BC
	2.0	1.4	25.4	40	BC
	2.4	1.6	25.4	40	BC
	3.0	2.0	25.4	40	BC
	1.2	0.8	25.4	60	BC
	2.0	1.4	25.4	60	BC
230	2.4	1.6	25.4	60	BC
	3.0	2.0	25.4	60	BC
	1.3	0.9	25.4	40	BC
255	1.8	1.2	25.4	40	BC
	1.2	0.8	25.4	40	BC
255	2.0	1.4	25.4	40	BC
	2.4	1.6	25.4	40	BC
	3.0	2.0	25.4	40	BC
	1.2	0.8	25.4	60	BC
	2.0	1.4	25.4	60	BC
	2.4	1.6	25.4	60	BC
305	3.0	2.0	25.4	60	BC
	1.6	1.1	25.4	40	BC
	2.0	1.4	25.4	40	BC
	2.4	1.6	25.4	40	BC
	3.0	2.0	25.4	40	BC・C
	3.0	2.0	38.1	40	BC
305	1.6	1.1	25.4	60	BC
	2.0	1.4	25.4	60	BC
	2.4	1.6	25.4	60	BC
	3.0	2.0	25.4	60	BC・C
	3.0	2.0	25.4	60	A・BA
	3.0	2.0	25.4	60	A・BA
355	3.2	2.2	25.4	40	BC・C
	3.4	2.4	38.1	30	BC
	2.6	1.8	25.4	40	BC
355	3.2	2.2	25.4	60	BC
	3.2	2.2	25.4	60	BC・C
405	3.2	2.2	25.4	40	BC・C
	2.6	1.8	25.4	60	BC
430	3.0	2.0	25.4	60	A・BA
	3.2	2.2	25.4	60	BC・C
455	3.2	2.2	25.4	60	A・BA
	3.2	2.2	25.4	40	BC・C
455	3.2	2.2	25.4	60	BC・C
	3.2	2.2	25.4	60	BC・C

※パーチ・MDFの厚物、塩ビ・アクリルの厚物にも対応できます。

※発泡ウレタン、発泡スチロールの切断にも対応できます。

ACTIVE TOOLING

For General Applications Cross Cutting / Plywood


一般木材〈ヨコ挽き用〉／ 合板〈切断用〉



SPECIFICATION 02

外径 (D)	刃厚 (T1)	台厚 (T2)	内径 (d)	刃数 (Z)	刃型 blade type
150	3.0	2.2	25.4	40	A
205	1.8	1.2	25.4	60	A
	2.4	1.6	25.4	60	A
	2.8	2.0	25.4	60	A
	3.0	2.2	25.4	60	A
255	1.8	1.2	25.4	80	A
	2.4	1.6	25.4	80	A
	2.8	2.0	25.4	80	A
	3.0	2.2	25.4	80	A
	1.8	1.2	25.4	100	A
	2.4	1.6	25.4	100	A
	2.8	2.0	25.4	100	A
	3.0	2.2	25.4	100	A
305	2.8	2.0	25.4	80	A
	3.0	2.2	25.4	100	A
	1.8	1.2	25.4	100	A
	2.4	1.6	25.4	100	A
	2.8	2.0	25.4	100	A
	3.0	2.2	25.4	100	A
	1.8	1.2	25.4	120	A
	2.4	1.6	25.4	120	A
355	3.0	2.2	25.4	80	A
	3.0	2.2	25.4	100	A
	3.0	2.2	25.4	120	A
	3.2	2.4	25.4	80	A・C
405	3.2	2.4	25.4	100	A・C
	3.2	2.4	25.4	120	A・C
	3.2	2.4	25.4	80	A・C
455	3.2	2.4	25.4	100	A・C
	3.2	2.4	25.4	120	A・C
	3.2	2.4	25.4	80	A・C
510	3.2	2.4	25.4	100	A・C
	3.2	2.4	25.4	120	A・C
	3.2	2.4	25.4	80	A・C

blade type : A



blade type : C



一般木材



合板




ヨコ挽き・切断

※一般的な切断に使用できる標準品です。

ACTIVE TOOLING

For General Applications / Plywood & Particle Board


一般木材／化粧合板／化粧パーティ・MDFなどの〈仕上カット用〉

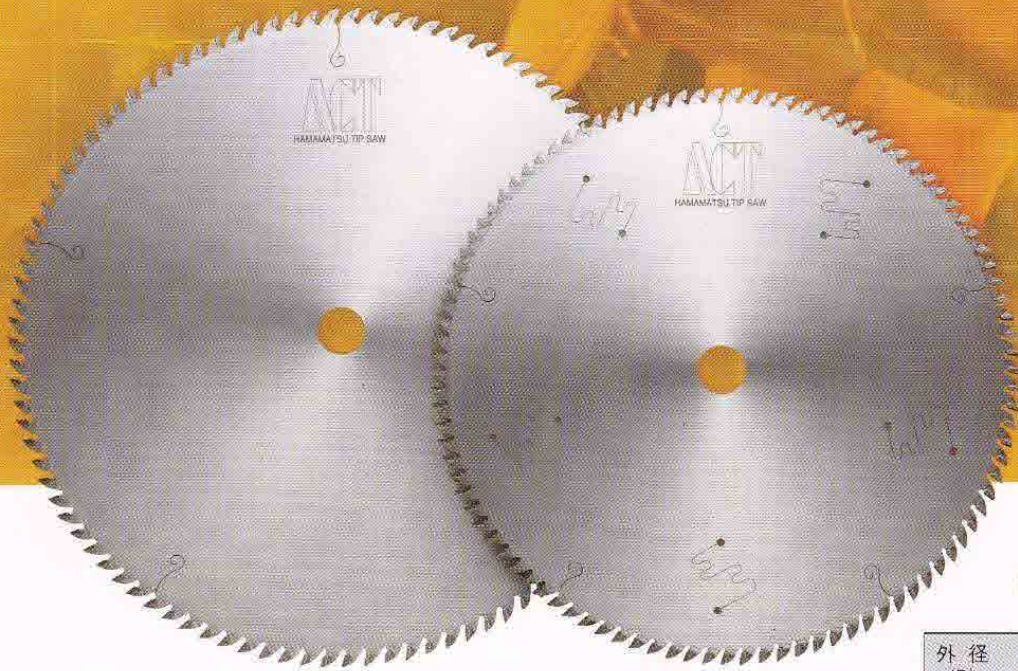


SPECIFICATION 01

外径 (D)	刃厚 (T1)	台厚 (T2)	内径 (d)	刃数 (Z)	刃型 blade type
205	2.8	2.0	25.4	60	A・BA
	3.0	2.2	25.4	60	BA
255	2.0	1.4	25.4	100	BA
	3.0	2.2	25.4	80	BA
	3.0	2.2	25.4	100	BA
305	2.0	1.4	31.75	100	BA
	2.8	2.0	25.4	100	BA
	3.0	2.2	25.4	100	A・BA
	3.0	2.2	25.4	120	BA
320	3.0	2.2	25.4	100	BA
330	3.0	2.2	25.4	100	BA
355	3.0	2.2	25.4	100	BA
	3.0	2.2	25.4	120	BA
365	3.0	2.2	25.4	100	BA
405	3.2	2.4	25.4	100	BA
	3.2	2.4	25.4	120	BA
455	3.2	2.4	25.4	100	BA
	3.2	2.4	25.4	120	BA

blade type : **A**



blade type : **BA**



MDF & 一般木材



化粧合板



化粧パーティ



仕上加工

※人工大理石および無機質系材料の切断にも対応できます。

※制振・消音タイプもございます。

※切削材により仕様が異なるため、お問合せ下さい。