


ACTIVE TOOLING

For Plastic.

樹脂用

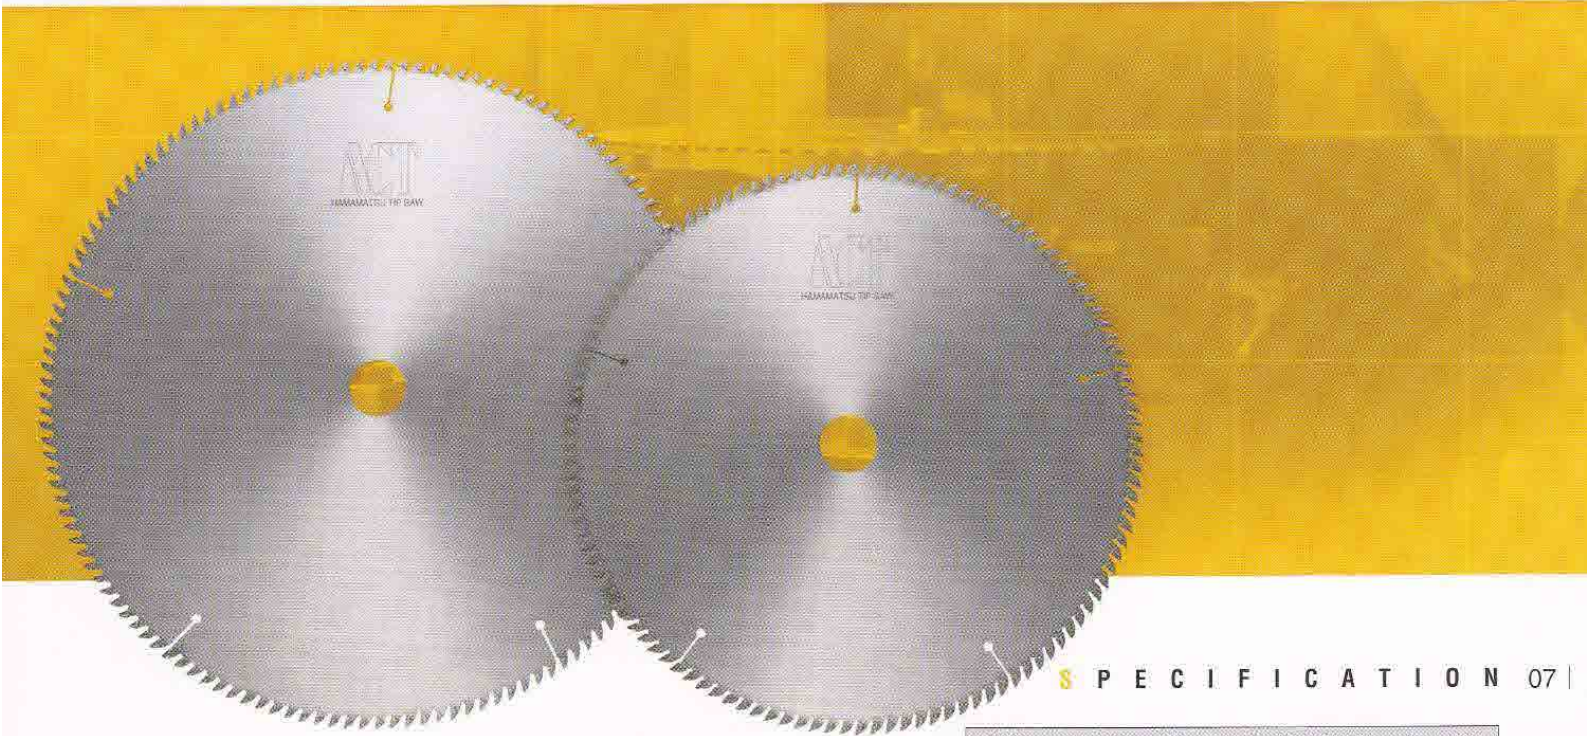



SPECIFICATION 07

外径 (D)	刃厚 (T1)	台厚 (T2)	内径 (d)	刃数 (Z)	刃型 blade type
205	1.8	1.2	25.4	80	BC
	1.8	1.2	25.4	100	BC
255	1.8	1.2	25.4	80	BC
	1.8	1.2	25.4	100	BC
	1.8	1.2	25.4	120	BC
	2.4	1.8	25.4	80	BC
305	2.4	1.8	25.4	100	BC
	2.4	1.8	25.4	120	BC
	2.0	1.4	25.4	100	BC
	2.0	1.4	31.75	100	BC・D
320	2.4	1.8	25.4	100	BC
	3.0	2.2	25.4	100	BC
	1.5	1.1	32.0	120	BC
	2.0	1.4	25.4	120	BC
	2.4	1.8	25.4	120	BC
	3.0	2.2	25.4	120	BC
	2.2	1.6	25.4	140	BC
	2.2	1.6	25.4	160	BC
355	2.0	1.4	25.4	120	BC
	2.0	1.4	31.75	120	BC
405	3.0	2.2	25.4	100	BC
	3.0	2.2	25.4	120	BC
405	3.0	2.2	25.4	120	BC
	3.0	2.2	25.4	140	BC

blade type : **BC**



blade type : **D**



樹脂



アクリル



切断

※塩ビ・アクリル・ABS・ペークライト等の切断に適します。