


ACTIVE TOOLING

For Metals.


金属用〈一般鋼・合金鋼・ステンレス鋼の切断用スローアウェイタイプ〉

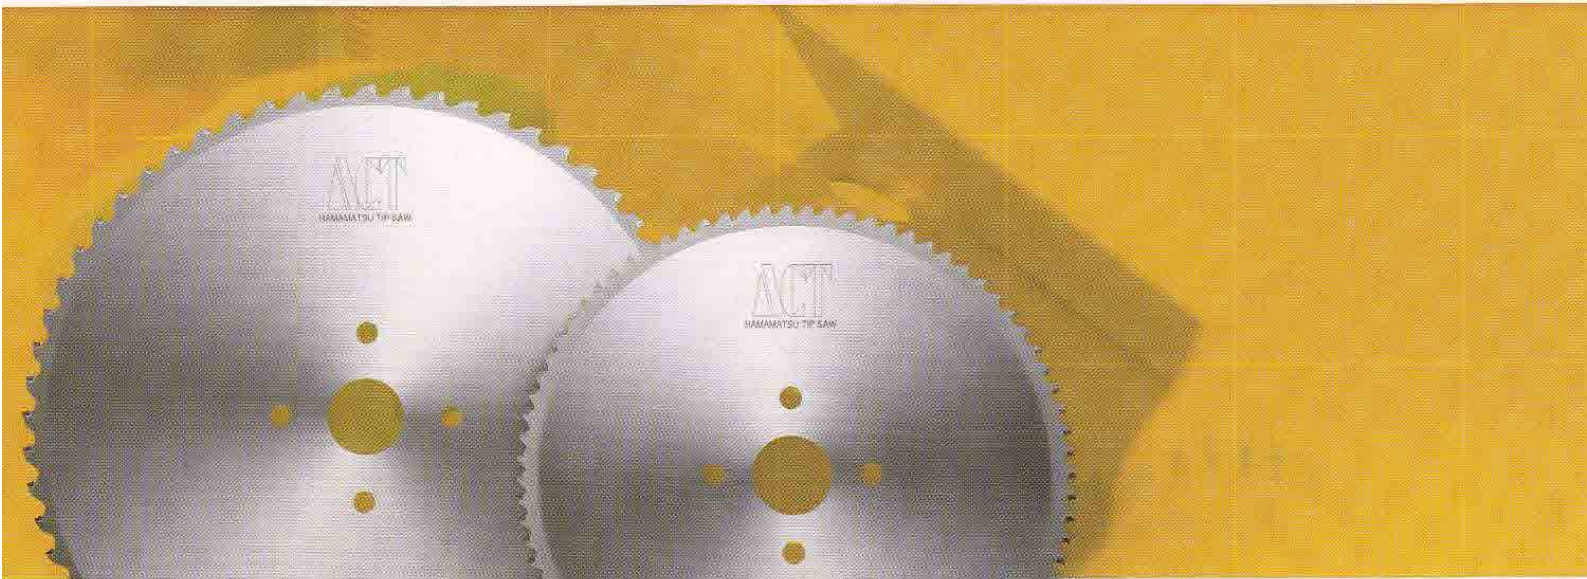

SPECIFICATION 08 |

外径 (D)	刃厚 (T1)	台厚 (T2)	内径 (d)	止め穴	刃数 (Z)	刃型 blade-type
250	2.0	1.7	32.0	4-11-63	54	TA
	2.0	1.7	32.0	4-11-63	60	TA
	2.0	1.7	32.0	4-11-63	72	TA
	2.0	1.7	32.0	4-11-63	80	TA
260	2.0	1.7	32.0	4-11-63	76	TA
	2.0	1.7	32.0	4-11-63	60	TA
280	2.0	1.7	32.0	4-11-63	80	TA
	2.0	1.75	40.0	4-11-80	60	TA
	2.0	1.75	40.0	4-11-80	80	TA
285	2.0	1.7	32.0	4-11-63	54	TA
	2.0	1.7	32.0	4-11-63	60	TA
	2.0	1.7	32.0	4-11-63	72	TA
	2.0	1.7	32.0	4-11-63	80	TA
	2.0	1.75	40.0	4-11-80	60	TA
	2.0	1.75	40.0	4-11-80	80	TA
360	2.6	2.25	40.0	4-11-90	60	TA
	2.6	2.25	40.0	4-11-90	80	TA
	2.6	2.25	40.0	4-11-90	100	TA
	2.6	2.3	50.0	4-15-80	60	TA
	2.6	2.3	50.0	4-15-80	80	TA
	2.6	2.3	50.0	4-15-80	100	TA
	2.6	2.3	50.0	4-15-80	100	TA
460	2.7	2.3	50.0	4-11-90	40	TA
	2.7	2.3	50.0	4-11-90	60	TA

blade type : TA



一般鋼



ステンレス



切断